



## X 170


TWO WAY COAXIAL

200 W

1. Neodymium tweeter with PEI dome, for a brilliant reproduction of high frequencies and compactness.
2. Tweeter faceplate optimized for exceptional off-axis performance.
3. High stiffness metallic-grey finish pressed-paper cone with water-repellent treatment.
4. Foam surround combining high sensitivity and deep bass response.
5. Pure copper 25mm (1 in.) voice coil woofer for high dynamic power handling.
6. High flux density 80mm (3.15 in.) ferrite magnet for a powerful undistorted sound.
7. Easy-to-install DIN size basket protected by abrasion-resistant dust paint.

### TECHNICAL SPECIFICATIONS

|                                      |                               |                                   |
|--------------------------------------|-------------------------------|-----------------------------------|
| <b>Component</b>                     | Two way coaxial               |                                   |
| <b>Size</b>                          |                               |                                   |
| Woofer                               | mm (in.)                      | 170 (6.7)                         |
| Tweeter diaphragm                    | mm (in.)                      | 24 (0.9)                          |
| <b>Voice Coil Ø</b>                  |                               |                                   |
| Woofer                               | mm (in.)                      | 25 (1)                            |
| Tweeter                              | mm (in.)                      | 14 (0.55)                         |
| <b>Power Handling</b>                |                               |                                   |
| W peak                               | 200                           |                                   |
| W continuous                         | 50                            |                                   |
| <b>Sensitivity</b>                   | dB SPL                        | 93.5                              |
| <b>Impedance</b>                     | Ω                             | 4                                 |
| <b>Frequency Response</b>            | Hz                            | 60 ÷ 21k                          |
| <b>Woofer Magnet size D x d x h</b>  | mm (in.)                      | 80 x 32 x 10 (3.15 x 1.26 x 0.39) |
| <b>Tweeter Magnet size D x d x h</b> | mm (in.)                      | 13 x 1,5 (0.51 x 0.06)            |
| <b>Weight of one speaker</b>         | kg (lb.)                      | 0,56 (1.23)                       |
| <b>Woofer Magnet</b>                 | High density flux ferrite     |                                   |
| <b>Tweeter Magnet</b>                | Neodymium                     |                                   |
| <b>Cone</b>                          | Water-repellent pressed paper |                                   |
| <b>Dome</b>                          | PEI                           |                                   |
| <b>Xmech</b>                         | mm (in.)                      | ±3 (0.12)                         |

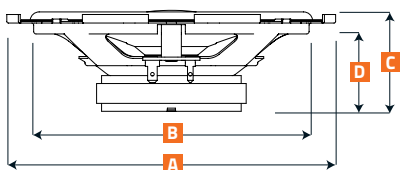

|          |        |          |
|----------|--------|----------|
| <b>A</b> | 165 mm | 6.5 in.  |
| <b>B</b> | 140 mm | 5.51 in. |
| <b>C</b> | 51 mm  | 2.01 in. |
| <b>D</b> | 45 mm  | 1.77 in. |